


IKA

designed for scientists

VAN-SP-2

/// Spindle dimensions (mm)

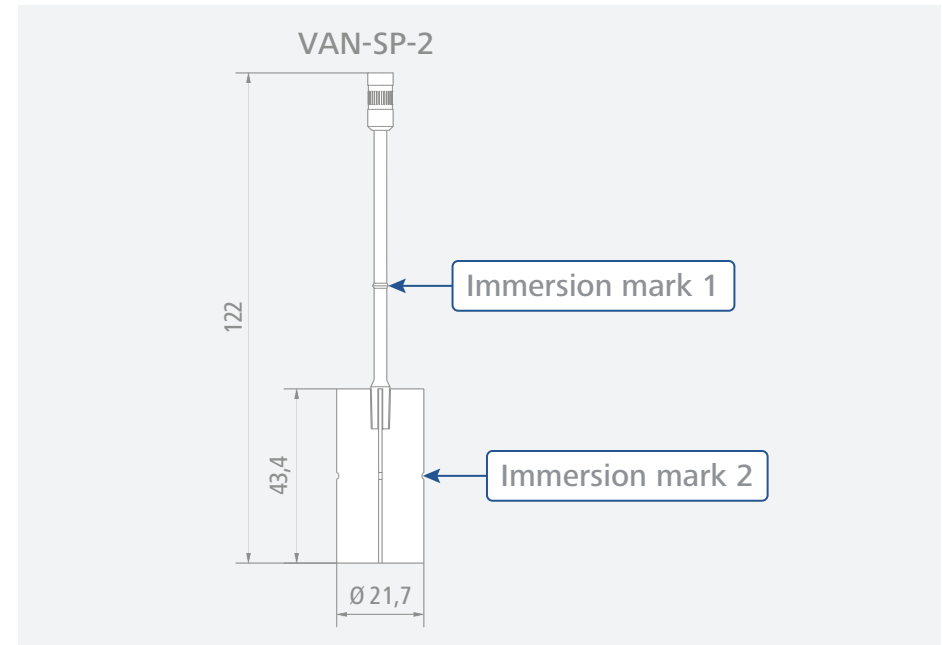

/// Full-scale range based on speed: 1... 200 rpm

| Spindle | lo-vi | | me-vi | | hi-vi I | | hi-vi II | |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| | <i>M%</i> | | <i>M%</i> | | <i>M%</i> | | <i>M%</i> | |
| | <u>100</u> | <u>100</u> | <u>100</u> | <u>100</u> | <u>100</u> | <u>100</u> | <u>100</u> | <u>100</u> |
| | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. |
| VAN-SP-2 | 52 | 10404 | 555 | 111000 | 1110 | 222000 | 4440 | 888000 |
| <i>rpm</i> | <u>200</u> | <u>1</u> | <u>200</u> | <u>1</u> | <u>200</u> | <u>1</u> | <u>200</u> | <u>1</u> |

/// Measuring range base on speed: 0.1... 10 rpm

| Spindle | lo-vi | | me-vi | | hi-vi I | | hi-vi II | |
|------------|-----------|------------|-----------|------------|-----------|------------|-----------|------------|
| | <i>M%</i> | | <i>M%</i> | | <i>M%</i> | | <i>M%</i> | |
| | <u>10</u> | <u>100</u> | <u>10</u> | <u>100</u> | <u>10</u> | <u>100</u> | <u>10</u> | <u>100</u> |
| | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. |
| VAN-SP-2 | 104 | 104040 | 1110 | 1110000 | 2220 | 2220000 | 8880 | 8880000 |
| <i>rpm</i> | <u>10</u> | <u>0.1</u> | <u>10</u> | <u>0.1</u> | <u>10</u> | <u>0.1</u> | <u>10</u> | <u>0.1</u> |