



Personal floor scale KERN MPN · MPN-L

Professional integratable personal scales for wireless transfer of weighing data to the EMR or EHR systems also for overweight patientes in the obese category

NEW



KERN MPN-M



KERN MPN-LM

Personal floor scale KERN MPN · MPN-L



Features

- Verification class III (verification is optional)
- Approved as a medical device according to 93/42/EEC
- Thanks to the integrated WiFi interface, this model is suited for wireless transfer of weights directly into the digital patient records, as soon as this is launched as a comprehensive service. By doing this, any documentation or transfer errors which occur during manual data transfer are eliminated. Thanks to this technology, this model can be integrated into existing or future EMR and EHR systems and ensures that your investment is future-proofed right now
- KERN Universal Port (KUP): permits the connection of an external KUP interface adapter, such as, for example, RS 232, USB, Bluetooth or Ethernet, for the exchange of data and control commands, without any installation outlay
- KERN MPN 300K-1LM: Version with [Max] = 300 kg and larger weighing plate. Specially suitable for weighing overweight patients who are in the obese category
- Ideally suited for hospitals, clinics and doctors' surgeries
- Robust design for daily use in a professional environment
- Easy and hygienic cleaning
- Secure and non-slip positioning with height-adjustable rubber feet

- **1** Level indicator to level the balance precisely
- KERN MPN 300K-1LM: Sturdy handle for easy transportation of the scale
- **2** Flexible positioning of display device, e.g. free-standing or mounted to the wall. Wall mount for display device standard
- Large platform with non-slip and wear-resistant surface made of plastic, to provide a secure footing for patients
- Hold function: When patients do not stand completely still, a stable weight is calculated using an average weight and this is then "frozen". This means that you have sufficient time to attend to the patient first and then take the weight reading in peace
- Mother and child function: the parent's weight will be taken and then the scale will be reset to zero at the push of a button. Afterwards then the parent and baby can be weighed together. The weight of the child will now be shown on the display. This is particularly good for infants, as this way they can be cradled, safe and sound, in the arms of the parent while being weighed
- BMI function to determine underweight/normal weight/surplus weight
- High resolution readability: Readability [d] can be increased by one decimal place for 5 sec. by the touch of a key
- Battery- or mains-powered, rechargeable battery operation optional
- Protective working cover included with delivery

Technical data

- Large LCD display, digit height 25 mm
- Weighing plate dimensions W×D×H
MPN: 365×370×80 mm
MPN-L: 400×500×120 mm
- Dimensions of display device W×D×H
210×54×100 mm
- Cable length of display device approx. 1,8 m
- Battery operation possible, 6×1.5 V AA not included, operating time up to 20 h
- Mains adapter external, standard
- Net weight approx. 12 kg


Accessories

- Internal rechargeable battery pack, operating time up to 48 h, charging time approx. 8 h, KERN YMR-01
- External data interface RS-232, Interface cable included, KERN YKUP-01
- External data interface USB, Interface cable included, KERN YKUP-03
- External mains adapter, 100 - 240 V, 50 - 60 Hz, Standard EU, UK, KERN YKA-51
- Bluetooth interface adapter, KERN YKUP-06
- Extension-Box, KERN YKUP-13
- Memory module with real time clock (alibi memory), KERN YMM-03

STANDARD



OPTION



FACTORY



* Within the EU, official verification is mandatory by law for scales that are intended for use as a medical device. Please add this to your order. We require the location of use and the post code for the verification.

Model	Weighing capacity	Readability	Verification value	Mandatory by law Verification
	[Max] kg	[d] kg	[e] kg	
KERN MPN 200K-1M	250	0,1	0,1	965-129
MPN 300K-1LM	300	0,1	0,1	965-129



Personal floor scale KERN MPN-P · MPN-H

Integratable personal scales for wireless transfer of weighing data to EMR or EHR systems



KERN **MPN-H**
with stand and
height rod




KERN **MPN-P**
with stand

NEW



Personal floor scale KERN MPN-P · MPN-H

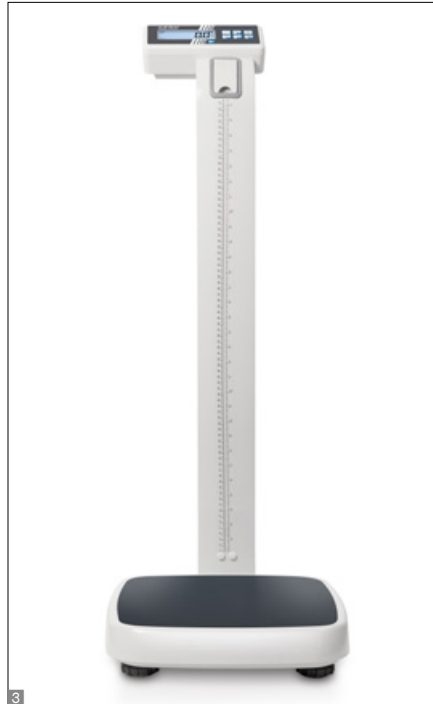

Features

- Verification class III (verification is optional)
- Approved as a medical device according to 93/42/EEC
- Thanks to the integrated WiFi interface, this model is suited for wireless transfer of weights directly into the digital patient records, as soon as this is launched as a comprehensive service. By doing this, any documentation or transfer errors which occur during manual data transfer are eliminated. Thanks to this technology, this model can be integrated into existing or future EMR and EHR systems and ensures that your investment is future-proofed right now
- KERN Universal Port (KUP): permits the connection of an external KUP interface adapter, such as, for example, RS 232, USB, Bluetooth or Ethernet, for the exchange of data and control commands, without any installation outlay
- **1** Practical second display on the back of the scale, which makes it easy for both the patient and the doctor or nursing staff to read the weight
- **2** The MPN-HM model has an elegant height rod integrated into the column, which can be pulled out for use and has a sturdy plastic head rest and a measuring range from 89 – 205 cm
- **3** Patients with a height below 80 cm can be measured using the measuring scale fitted on the column

- The ergonomically optimised shape and robust design mean that this range is ideal for daily use in a professional environment
- Secure and non-slip positioning with height-adjustable rubber feet
- Large platform with non-slip and wear-resistant surface made of plastic, to provide a secure footing for patients
- Hold function: When patients do not stand completely still, a stable weight is calculated using an average weight and this is then “frozen”. This means that you have sufficient time to attend to the patient first and then take the weight reading in peace
- Mother and child function: the parent’s weight will be taken and then the scale will be reset to zero at the push of a button. Afterwards then the parent and baby can be weighed together. The weight of the child will now be shown on the display. This is particularly good for infants, as this way they can be cradled, safe and sound, in the arms of the parent while being weighed
- BMI function to determine underweight/normal weight/surplus weight
- High resolution readability: Readability [d] can be increased by one decimal place for 5 sec. by the touch of a key
- **5** Easy to transport thanks to the two integrated transport wheels
- **4** Battery- or mains-powered, rechargeable battery operation optional
- Protective working cover included with delivery

Technical data

- Large LCD display, digit height 25 mm
- Weighing plate dimensions W×D×H 365×360×80 mm
- Overall dimensions W×D×H
MPN-PM: 365×570×1030 mm
MPN-HM: 365×570×2134 mm, with extracted height rod
- Battery operation possible, 6×1.5 V AA not included, operating time up to 20 h
- Mains adapter external, standard
- Net weight approx. 12 kg


Accessories

- Internal rechargeable battery pack, operating time up to 48 h, charging time approx. 8 h, KERN YMR-01
- External data interface RS-232, Interface cable included, KERN YKUP-01
- External data interface USB, Interface cable included, KERN YKUP-03
- External mains adapter, 100 – 240 V, 50 – 60 Hz, Standard EU, UK, KERN YKA-51
- Bluetooth interface adapter, KERN YKUP-06
- Extension-Box, KERN YKUP-13
- Memory module with real time clock (alibi memory), KERN YMM-03

STANDARD



OPTION



FACTORY



* Within the EU, official verification is mandatory by law for scales that are intended for use as a medical device. Please add this to your order. We require the location of use and the post code for the verification.

Model	Weighing capacity	Readability	Verification value	Mandatory by law
				Verification
KERN	[Max] kg	[d] kg	[e] kg	KERN
MPN 200K-1PM	250	0,1	0,1	965-129
MPN 200K-1HM	250	0,1	0,1	965-129



Adjusting program CAL:

For quick setting up of the balance's accuracy. External adjusting weight required



Memory:

Balance memory capacity, e.g. for article data, weighing data, tare weights, PLU etc.



Data interface RS-232:

To connect the balance to a printer, PC or network



RS-485 data interface:

To connect the balance to a printer, PC or other peripherals. Suitable for data transfer over large distances. Network in bus topology is possible



Bluetooth* data interface:

To transfer data from the balance to a printer, PC or other peripherals



WIFI data interface:

To transfer data from the balance to a printer, PC or other peripherals



Control outputs

(optocoupler, digital I/O): To connect relays, signal lamps, valves, etc.



Statistics:

using the saved values, the device calculates statistical data, such as average value, standard deviation etc.



PC Software:

to transfer the measurements from the device to a PC



GLP/ISO log:

With date and time. Only with KERN printers



KERN Communication Protocol (KCP):

It is a standardized interface command set for KERN balances and other instruments, which allows retrieving and controlling all relevant parameters and functions of the device. KERN devices featuring KCP are thus easily integrated with computers, industrial controllers and other digital systems



Piece counting:

Reference quantities selectable. Display can be switched from piece to weight



Totalising level A:

The weights of similar items can be added together and the total can be printed out



Weighing units:

Can be switched to e.g. nonmetric units. Please refer to website for more details



Weighing with tolerance range

(Check weighing) Upper and lower limiting can be programmed individually, e.g. for sorting and dosing. The process is supported by an audible or visual signal, see the relevant model



ZERO:

Resets the display to "0"



Hold function:

When patients do not stand, sit or lie completely still, a stable weight is calculated using an average weight



Hold function:

When the weighing conditions are unstable, a stable weight is calculated as an average value



Protection against dust and water splashes IPxx:

The type of protection is shown in the pictogram cf. DIN EN 60529:2000-09, IEC 60529:1989+A1:1999+A2:2013



Suspended weighing:

Load support with hook on the underside of the balance



Battery operation:

Ready for battery operation. The battery type is specified for each device



Rechargeable battery pack:

Rechargeable set



Battery operation rechargeable

Prepared for a rechargeable battery operation



Universal plug-in power supply:

with universal input and optional input socket adapters for
A) EU, CH
B) EU, CH, GB, USA



Plug-in power supply:

230V/50Hz in standard version for EU. On request GB, AUS or USA version available



Integrated power supply unit:

Integrated in balance. 230V/50Hz standard EU. More standards e.g. GB, AUS or USA on request



Weighing principle: Strain gauges

Electrical resistor on an elastic deforming body



Peak hold function:

capturing a peak value within a measuring process



Push and Pull:

the measuring device can capture tension and compression forces



Integrated scale:

In the eyepiece



360° rotatable microscope head



Monocular Microscope:

For the inspection with one eye



Binocular Microscope:

For the inspection with both eyes



Trinocular Microscope:

For the inspection with both eyes and the additional option for the connection of a camera



Abbe Condenser:

With high numerical aperture for the concentration and the focusing of light



Halogen illumination:

For pictures bright and rich in contrast



LED illumination:

Cold, energy-saving and especially long-life illumination



Fluorescence illumination for compound microscopes:

With 100 W mercury lamp and filter



Fluorescence illumination for compound microscopes:

With 3 W LED illumination and filter



Phase contrast unit:

For a higher contrast



Darkfield condenser/unit:

For a higher contrast due to indirect illumination



Polarising unit:

To polarise the light



Infinity system:

Infinity corrected optical system



Automatic temperature compensation:

For measurements between 10 °C and 30 °C



Verification possible:

The time required for verification is specified in the pictogram



Package shipment:

The time required for internal shipping preparations is shown in days in the pictogram



Pallet shipment:

The time required for internal shipping preparations is shown in days in the pictogram

The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by KERN & SOHN GmbH is under license. Other trademarks and trade names are those of their respective owners.